
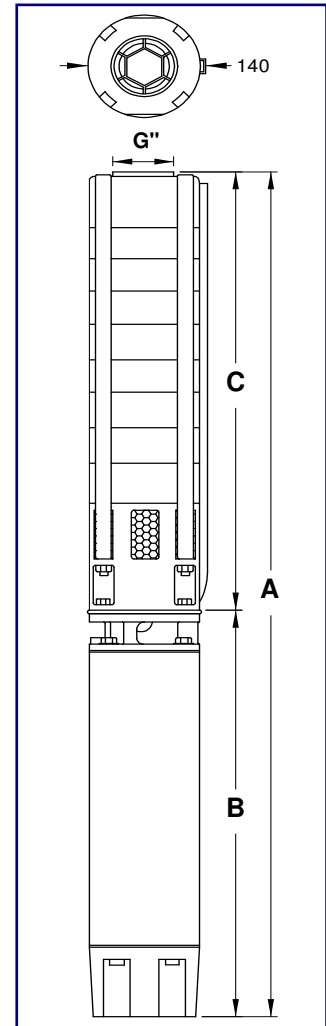


Pumpkapacitet vid 2850 rpm  
Testad enligt ISO 9906

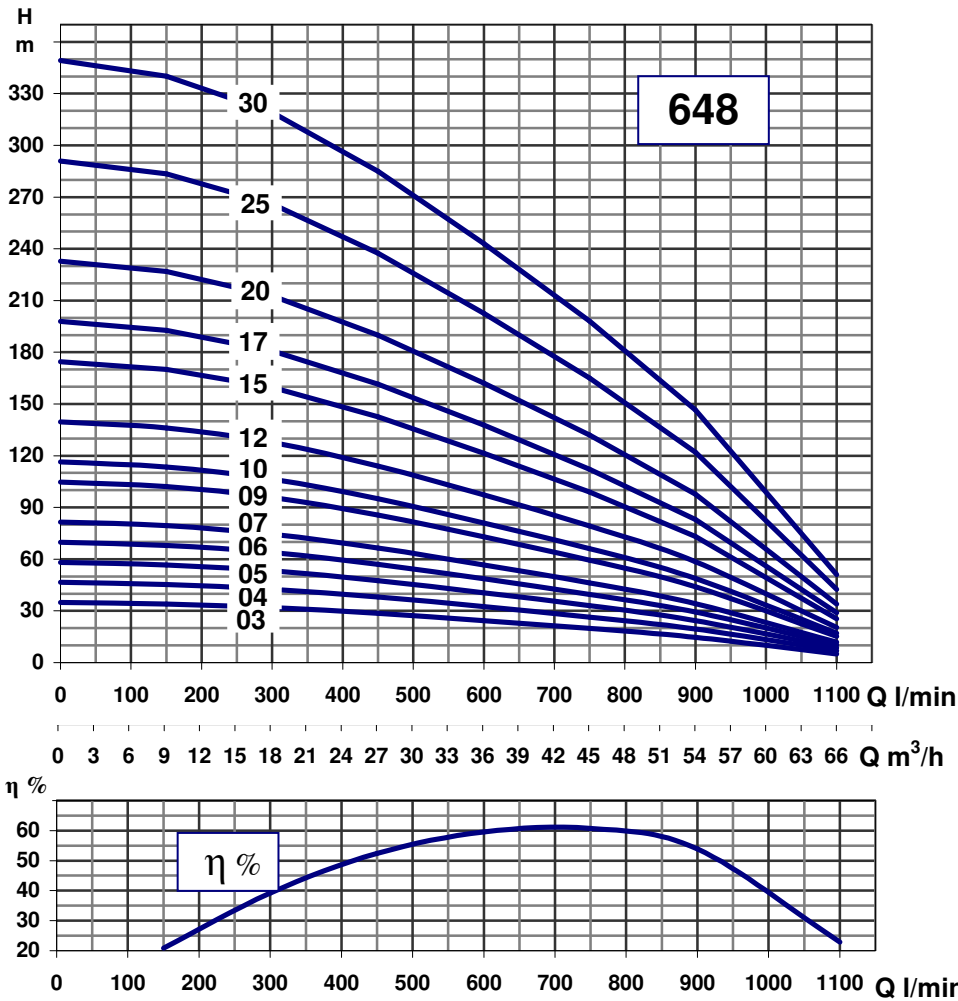

Modell	Spänning Volt	Motor		Q - Flöde											Måttangivelser & vikter									
				kW   A		m³/h	0	9	18	27	36	45	54	66	l/min	0	150	300	450	600	750	900	1100	A
				H - Tryckhöjd (mvp)																				
DB4 648 03	3~220/230 3~380/415	4	16,1 9,3	35	34	32	29	24	20	15	5	1141	581	560	3"	47								
DB4 648 04	3~220/230 3~380/415	5,5	21,7 12,5	47	45	43	38	32	26	20	7	1242	614	628	3"	52								
DB6 648 05	3~220/230 3~380/415	7,5	27,7 16,0	58	57	53	48	41	33	24	9	1342	646	696	3"	57								
DB6 648 06	3~220/230 3~380/415	9,3	36,0 20,7	70	68	64	57	49	40	29	10	1443	679	764	3"	61								
DB6 648 07	3~220/230 3~380/415	11	40,4 23,3	81	79	74	67	57	46	34	12	1543	711	832	3"	65								
DB6 648 09	3~220/230 3~380/415	15	54,2 31,3	105	102	96	86	73	59	44	15	1744	776	968	3"	73								
DB6 648 10	3~220/230 3~380/415	15	54,2 31,3	116	113	106	95	81	66	49	17	1812	776	1036	3"	75								
DB6 648 12	3~220/230 3~380/415	18,5	66,7 38,5	140	136	128	114	97	79	59	20	2014	842	1172	3"	84								
DB6 648 15	3~220/230 3~380/415	22	78,5 45,3	175	170	160	143	122	99	73	26	2283	907	1376	3"	93								
DB6 648 17	3~220/230 3~380/415	30	107,0 63,5	198	193	181	162	138	112	83	29	2549	1037	1512	3"	110								
DB6 648 20	3~220/230 3~380/415	30	107,0 63,5	233	227	213	190	162	132	98	34	2753	1037	1716	3"	113								
DB6 648 25	3~220/230 3~380/415	37	127,0 73,0	291	284	266	238	203	165	122	43	3461	1405	2056	3"	152								
DB6 648 30	3~380/415	45	93,9	349	340	319	285	243	198	146	51	3953	1557	2396	3"	173								